

Technical data sheet

Impact tie, version with collar

Item no. 3492003



Impact tie for single fastening of non-load-bearing systems in non-cracked concrete as well as for multiple fastening in cracked and non-cracked concrete.
 Tested to fire protection standards, fire resistance class R 120 according to European Technical Approval ETA-02/0020 (option 7) and European Technical Approval ETA-05/0116.
 Mounting with marking and setting tool.




A4 Stainless steel, rustproof

Master data

Item no.	3492003
Type	ES M 8x30 A4
Description 1	Drop-in anchor ES
Dimension	8x30
Material	Stainless steel, material A4
Material symbol	A4
Smallest sales unit (VG)	50 Piece
Weight	1,10 kg/100 pc.

Technical data

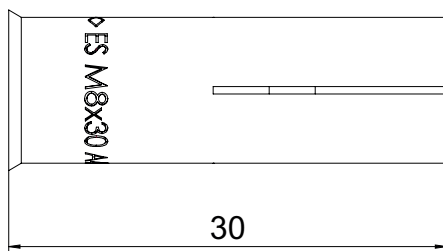

Length	30,00 mm
Dimension L	30,00 mm
Dimension	8x30 mm
Version	Lightning strike
Fastening unit	Other
Drill hole depth	30,00 mm
Drill hole diameter	10,00 mm
Screw-in depth min.-max.	9,00 - 13,00 mm
Thread	M8
Thread metric	8
Self-drilling	<input type="checkbox"/>
Permitted load range, tension zone	1,70 kN
Approvals available	<input checked="" type="checkbox"/>