

# Technical data sheet

## Clamp clip 2056 U-foot, 3-fold, plastic pressure sleeve, Al

Item number: 1186918



Clamp clip with U-foot, plastic pressure sleeve made of polypropylene. For vertical and horizontal mounting of 3 single cables on a C-profile rail. For slot width 18–22 mm. With 1-start screw thread on pressure sleeve, universal hexagonal screw head WAF10, with slot and cross recess. Suitable for assembly indoors and outdoors. Multiple cables should be separated by double sleeves. We recommend the use of a counter-sleeve.



**Alu** Aluminium

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 1186918                  |
| Type                               | BS-U3-K-22 ALU           |
| Description 1                      | Clamp clip 2056          |
| Description 2                      | triple                   |
| Manufacturer                       | OBO                      |
| Dimension                          | 16-22mm                  |
| Material                           | Aluminium                |
| Smallest sales unit                | 50                       |
| Unit of quantity                   | Piece                    |
| Weight                             | 2.515 kg                 |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,3439 kg CO2e / 1 Piece |


# Technical data sheet

Clamp clip 2056 U-foot, 3-fold, plastic pressure sleeve, Al

Item number: 1186918



## Dimensions

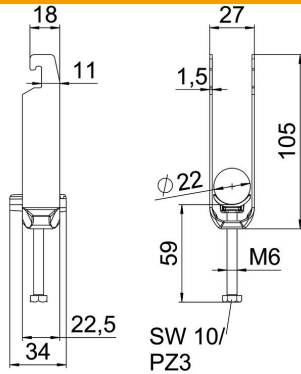

|                  |         |
|------------------|---------|
| Length           | 22.5 mm |
| Width            | 27 mm   |
| Height           | 105 mm  |
| Plate thickness  | 1.5 mm  |
| Dimension A      | 22.5 mm |
| Dimension B      | 27 mm   |
| Dimension C      | 34 mm   |
| Dimension G (mm) | M6      |
| Dimension H      | 105 mm  |
| Dimension L      | 59 mm   |
| Dimension t      | 1.5 mm  |

## Technical data

|                                                |               |
|------------------------------------------------|---------------|
| Number of cables/pipes                         | 3             |
| For pipe diameter, max.                        | 22 mm         |
| For pipe diameter, min.                        | 16 mm         |
| for rail with slot width (with interval), max. | 22 mm         |
| for rail with slot width (with interval), min. | 18 mm         |
| Thread                                         | M6            |
| Halogen-free                                   | yes           |
| Length of external dimensions                  | 34 mm         |
| Max. Tightening torque                         | 3 Nm          |
| With plastic trough                            | yes           |
| With metal trough                              | no            |
| Mounting type                                  | Profile rail  |
| Slot width                                     | 10 mm         |
| Clamping range D, max.                         | 22 mm         |
| Clamping range D, min.                         | 16 mm         |
| Surface addition                               | Untreated     |
| Material addition                              | Aluminium     |
| With counter-trough                            | no            |
| Material of trough                             | Plastic       |
| Material quality of trough                     | Polypropylene |