# Technical data sheet

## Universal counter-trough, plastic

## Item number: 1198064

Regardless of the type of rail, the counter-trough can be used by applying it onto one side of the clamp clip. Due to an intelligent contour on the backside, the counter-trough can be combined to a double trough. Retrofitting possible without the need to dismantle.

HALOGEN FREE

F N H U W

PP Polypropylene

### Master data

| | |
|---|---|
| Item number | 1198064 |
| Type | 2058UW 64 LGR |
| Description 1 | Counter-trough |
| Description 2 | combinable with double trough |
| Available from | 15.05.2019 |
| Manufacturer | OBO |
| Dimension | 58-64mm |
| Colour | Light grey; RAL 7035 |
| Material | Polypropylene |
| Smallest sales unit | 50 |
| Unit of quantity | Piece |
| Weight | 0.877 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0287 kg CO2e / 1 Piece |

# Technical data sheet

## Universal counter-trough, plastic

## Item number: 1198064

### Dimensions




| | |
|---|---|
| Dimension B | 69.5 mm |
| Dimension H | 11.8 mm |
| Dimension L | 40 mm |

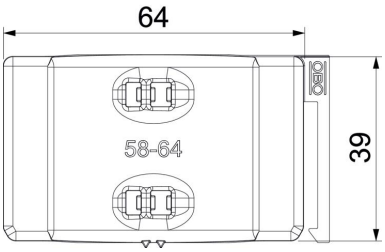


### Technical data

| | |
|---|---|
| Counter-trough/clip version | Counter sleeve |
| Suitable for max. cable diameter | 64 mm |
| Clamping range D, max. | 64 mm |
| Clamping range D, min. | 58 mm |