

Technical data sheet

Spacer clip 732 G

Item number: 1362420



Spacer clip for the installation of pipes and cables on walls, ceilings and floors. With self-locking cover. Fastening via attachment piece with internal thread.

Approved for the maintenance of electrical function according to DIN 4102 Part 12, maintenance of electrical function classes E 30 to E 90.



St Steel

G Electrogalvanized

Master data

| | |
|------------------------------------|-----------------------------|
| Item number | 1362420 |
| Type | ASG 732 20 G |
| Description 1 | Distance saddle |
| Description 2 | with threaded connection M6 |
| Manufacturer | OBO |
| Dimension | 17-20mm |
| Material | Steel |
| Surface | Electrogalvanized |
| Surface standard | EN ISO 19598 / EN ISO 4042 |
| Smallest sales unit | 25 |
| Unit of quantity | Piece |
| Weight | 1.895 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,056 kg CO2e / 1 Piece |


Technical data sheet

Spacer clip 732 G

Item number: 1362420



Dimensions

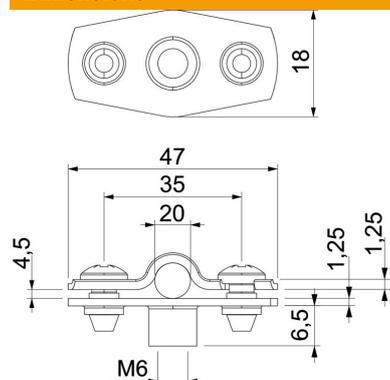

| | |
|-------------------|--------|
| Dimension A | 47 mm |
| Dimension B | 35 mm |
| Dimension b | 18 mm |
| Dimension D | 20 mm |
| Dimension d max. | 20 mm |
| Dimension d min. | 17 mm |
| Dimension H1 | 6.5 mm |
| Dimension t1 (mm) | 1.25 |
| Dimension t2 (mm) | 1.25 |
| Dimension x | 4.5 mm |

Technical data

| | |
|-------------------------------|---------------------|
| Distance to the wall | yes |
| Number of cables/pipes | 1 |
| Version for | Closed |
| Fastening type | Threaded connection |
| Maintain electrical functions | yes |
| For diameter | 17 - 20 |
| Halogen-free | yes |
| Plastic-covered | no |
| Material thickness | 1.25 mm |
| Clamping range D, max. | 20 mm |
| Clamping range D, min. | 17 mm |
| UV-resistant | yes |