

Technical data sheet

Spacer clip 732 A2

Item number: 1362632



Spacer clip for the installation of pipes and cables on walls, ceiling and floors.
With self-locking upper part.
Approved for the maintenance of electrical function according to DIN 4102 Part 12, maintenance of electrical function classes E30 to E90.



A2 Stainless steel

Master data

| | |
|------------------------------------|-----------------------------|
| Item number | 1362632 |
| Type | ASG 732 14 A2 |
| Description 1 | Distance saddle |
| Description 2 | with threaded connection M6 |
| Manufacturer | OBO |
| Dimension | 12-14mm |
| Material | Stainless steel 1.4301 |
| Smallest sales unit | 25 |
| Unit of quantity | Piece |
| Weight | 1.859 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,1725 kg CO2e / 1 Piece |


Technical data sheet

Spacer clip 732 A2

Item number: 1362632



Dimensions

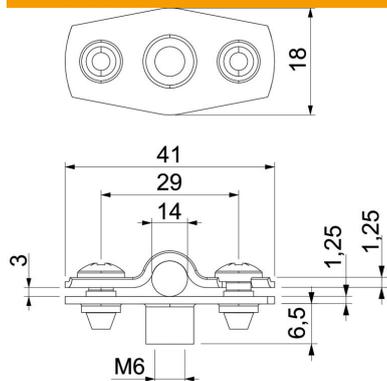

| | |
|-------------------|-------|
| Dimension A | 41 mm |
| Dimension B | 29 mm |
| Dimension b | 18 mm |
| Dimension D | 14 mm |
| Dimension d max. | 14 mm |
| Dimension d min. | 12 mm |
| Dimension H1 | 12 mm |
| Dimension t1 (mm) | 1.25 |
| Dimension t2 (mm) | 1.25 |
| Dimension x | 3 mm |

Technical data

| | |
|-------------------------------|---------|
| Distance to the wall | yes |
| Number of cables/pipes | 1 |
| Version for | Closed |
| Maintain electrical functions | yes |
| For diameter | 12 - 14 |
| Halogen-free | yes |
| Plastic-covered | no |
| Material thickness | 1.25 mm |
| Clamping range D, max. | 14 mm |
| Clamping range D, min. | 12 mm |
| UV-resistant | yes |