

# Technical data sheet

## Spacer clip 733 G

Item number: 1362758



Spacer clip for the installation of pipes and cables on walls, ceilings and floors. With self-locking cover. Fastening via slot.

Approved for the maintenance of electrical function according to DIN 4102 Part 12, maintenance of electrical function classes E 30 to E 90.



**St** Steel

**G** Electrogalvanized

### Master data

|                                    |                            |
|------------------------------------|----------------------------|
| Item number                        | 1362758                    |
| Type                               | ASL 733 14 G               |
| Description 1                      | Distance saddle            |
| Description 2                      | with slot                  |
| Manufacturer                       | OBO                        |
| Dimension                          | 12-14mm                    |
| Material                           | Steel                      |
| Surface                            | Electrogalvanized          |
| Surface standard                   | EN ISO 19598 / EN ISO 4042 |
| Smallest sales unit                | 25                         |
| Unit of quantity                   | Piece                      |
| Weight                             | 1.936 kg                   |
| Weight unit                        | kg/100 pc.                 |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0585 kg CO2e / 1 Piece   |


# Technical data sheet

## Spacer clip 733 G

Item number: 1362758



### Dimensions

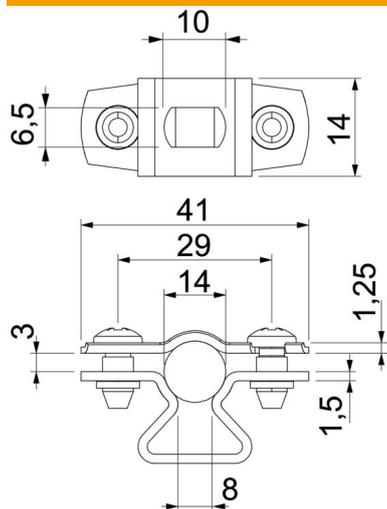

|                   |       |
|-------------------|-------|
| Dimension A       | 41 mm |
| Dimension B       | 29 mm |
| Dimension b       | 14 mm |
| Dimension D       | 14 mm |
| Dimension d max.  | 14 mm |
| Dimension d min.  | 12 mm |
| Dimension L       | 10 mm |
| Dimension s       | 8 mm  |
| Dimension t1 (mm) | 1.25  |
| Dimension t2 (mm) | 1.5   |
| Dimension x       | 3 mm  |

### Technical data

|                               |            |
|-------------------------------|------------|
| Distance to the wall          | yes        |
| Number of cables/pipes        | 1          |
| Version for                   | Closed     |
| Fastening type                | Screw hole |
| Maintain electrical functions | yes        |
| For diameter                  | 12 - 14    |
| Halogen-free                  | yes        |
| Plastic-covered               | no         |
| Material thickness            | 1.5 mm     |
| Clamping range D, max.        | 14 mm      |
| Clamping range D, min.        | 12 mm      |
| UV-resistant                  | yes        |