

Technical data sheet

CombiController V20 B+C, plug-in arrester 320 V

Item number: 5099847



SurgeController cover – type 1 + 2 surge arrester

- Plug-in cover; upper part can be separated from base without tools
 - Incl. thermal and dynamic cut-off unit and visual display of defects
 - High current conductivity and long service life
- Upper part



Master data		
Item number	5099847	
Type	V20-B+C 0-320	
Description 1	SurgeController V20	
Description 2	plug-in arrester	
Manufacturer	OBO	
Dimension	320V	
Smallest sales unit	1	
Unit of quantity	Piece	
Weight	5.5 kg	
Weight unit	kg/100 pc.	
CO2 Footprint (GWP) Cradle-to-Gate	0,1239 kg COe / 1 Piece	


Technical data sheet

CombiController V20 B+C, plug-in arrester 320 V


Item number: 5099847



Dimensions

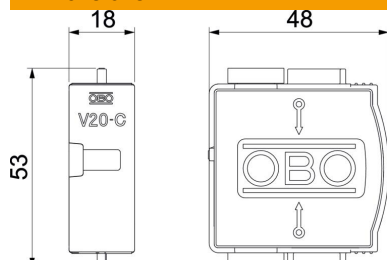

Technical data



Arrester surge current (8/20 µs) [total]	20 kA
Response time	<25 ns
Version for	1-pin cover; 320 V
Pole version	1
Structural width in division units (division unit, 17.5 mm)	1
Operating temperature, max.	80 °C
Operating temperature, min.	-40 °C
Maximum continuous voltage AC	320 V
Maximum continuous voltage DC	420 V
Integrated back-up fuse	no
Conductor cross-section, rigid (single-wire/multiwire), max.	35 mm ²
Lightning protection zone LPZ	0→2
Max. mains-side overcurrent protection	125
Maximum back-up fuse	125 A
Maximum discharge current (8/20 µs)	40 kA
Installation type	On basic element
Nominal discharge current (8/20 µs)	20 kA
Nominal discharge current (8/20 µs) [L-N]	20 kA
Nominal voltage AC (50/60 Hz)	320 V
Network form	TN
Test class, type 2	yes
Protection rating	IP20
Protection level	≤1,4
Signalling on device	Visual
SPD to EN 61643-11	Type 1+2
SPD to IEC 61643-1	Class I+II
Permitted temperature range, max.	80 °C
Permitted temperature range, min.	-40 °C