

# Technical data sheet

## Flat conductor, copper

Item number: 5450462



- Can be used as a conductor according to DIN EN 62561-2 (VDE 0185-561-2)
- Complies with the requirements of VDE 0185-305 (IEC 62305)
- For lightning protection, earthing systems and ring equipotential bonding




Cu

Copper

### Master data

|                     |             |
|---------------------|-------------|
| Item number         | 5450462     |
| Description 1       | Steel strip |
| Description 2       | PVC coated  |
| Manufacturer        | OBO         |
| Dimension           | 25x3 mm     |
| Colour              | Brown       |
| Material            | Copper      |
| Smallest sales unit | 50          |
| Unit of quantity    | Metre       |
| Weight              | 0 kg        |
| Weight unit         | kg/100 m    |

### Dimensions

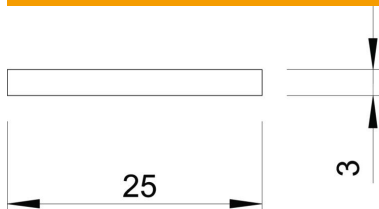

|             |       |
|-------------|-------|
| Dimension B | 25 mm |
| Dimension H | 3 mm  |

# Technical data sheet

Flat conductor, copper

Item number: 5450462



## Technical data

|                    |                    |
|--------------------|--------------------|
| Length tolerance ± | 5 %                |
| Cross-section      | 75 mm <sup>2</sup> |