

Technical data sheet

Flat angle, for device installation trunking Rapid 45-2 type
GA-53165

Item number: 6112630



90° aluminium flat angle for direction change of Rapid 45-2 GA... device installation trunking.

Note:

For anodised device installation trunking and fittings made from aluminium, light colour differences caused by permitted scatter due to the material and process conditions cannot be avoided (according to DIN 17 611). 45 mm devices can be clicked in directly. When using PC/ABS hood fittings, there may be colour differences due to the different materials.



Alu Aluminium

Master data

| | |
|------------------------------------|---------------------------|
| Item number | 6112630 |
| Type | GA-FS53165RW |
| Description 1 | Flat angle |
| Description 2 | Aluminium, rigid form |
| Manufacturer | OBO |
| Dimension | 53x165x250 |
| Colour | Pure white; RAL 9010 |
| Material | Aluminium |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 121.9 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 20,1046 kg CO2e / 1 Piece |


Technical data sheet

Flat angle, for device installation trunking Rapid 45-2 type
GA-53165

Item number: 6112630



Dimensions

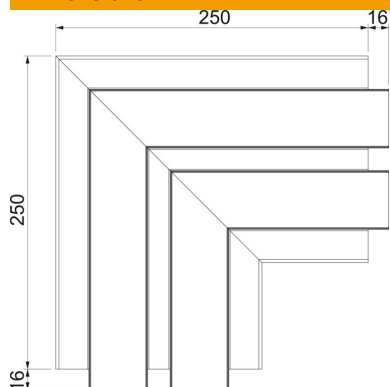

| | |
|--------|--------|
| Length | 250 mm |
| Width | 165 mm |
| Height | 53 mm |

Technical data

| | |
|-----------------------------------|--------------------------|
| Number of covers | 2 |
| Version for | Base and cover |
| for duct width | 165 mm |
| for trunking height | 53 mm |
| Halogen-free | yes |
| Cable retaining clip | no |
| Duct connector | no |
| Cover mounting type | Internal |
| Mounting perforation in base | no |
| Cover width | 45 mm |
| Cover width 2 | 45 mm |
| Change of direction | Vertical, rising/falling |
| Protection rating | IP40 |
| Protective film | yes |
| Protection rating IK code | IK10 |
| Symmetrical | yes |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -15 °C |
| Angle range, min. | 90 mm |