

Technical data sheet

US 5 support

Item number: 6341398



Suspended support (U profile) with welded head plate.
For fastening to horizontal concrete ceilings and steel girders. For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 45.



A2 Stainless steel

2B Bright, treated

Master data

Type	US 5 K 120 A2
Manufacturer	OBO
Material	.304 Stainless Steel
Surface	Bright, reworked
Surface standard	
Smallest sales unit	1
Unit of quantity	Units
Weight	360 kg
Weight unit	kg/100 pairs

Dimensions

Length	1,200 mm
Width	50 mm
Height	50 mm

Features/properties/dimensions

Version for	U profile
Bracket length 200	4 kN
Bracket length 400	2.2 kN
Bracket length 600	1.7 kN
Maintain electrical functions	no
Material thickness	2.5 mm
Maximum tensile load	10 kN


Technical data sheet

US 5 support

Item number: 6341398



Loads

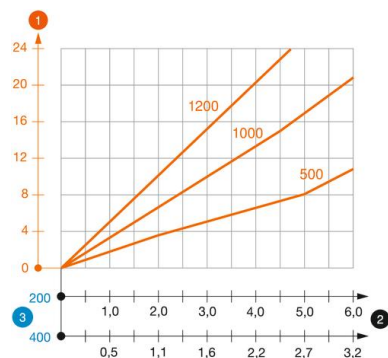

Load diagram, U support, type US 5 K VA

- 1 Bending of the end of the suspended support at permitted bracket load
- 2 Permitted bracket load in kN without man load
- 3 Bracket length in mm
- Load curves with support lengths in mm