

# Technical data sheet

## Wall and support bracket AW 30

Item number: 6442803



Medium-duty wall and support bracket with welded head plate.  
Fastening of the bracket to the U support of width 400 mm or greater using hexagonal bolt through both sides of the support. Please insert suitable spacers.



**A2** Stainless steel

**2B** Bright, treated

### Master data

Type	AW 30 11 A2
Manufacturer	OBO
Material	.304 Stainless Steel
Surface	Bright, reworked
Surface standard	
Smallest sales unit	1
Unit of quantity	Units
Weight	21 kg
Weight unit	kg/100 pairs

### Dimensions

Length	110 mm
Width	110 mm
Height	60 mm
Dimension A	50 mm
Dimension B	110 mm
Dimension H	60 mm
Dimension L	110 mm

### Features/properties/dimensions

Version for	Wall and support bracket
F in kN	3 kN
Maintain electrical functions	no
Hole diameter	11 mm
Rustproof steel, pickled	yes
Angle range, max.	90 mm
Angle range, min.	90 mm


# Technical data sheet

## Wall and support bracket AW 30

Item number: 6442803



### Loads

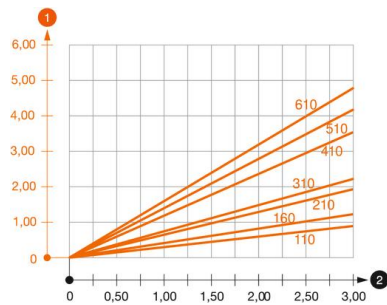

#### Load diagram, bracket, type AW 30

- 1 Bending of the bracket tip at permitted bracket load
- 2 Permitted bracket load in kN without man load
- Load curve with bracket lengths in mm