

Technical data sheet

Cable tray GKS FL 100 FS

Item number: 6480023



GKS 100 FL = unperforated cable tray system with 100 mm side height
Magnetic shield insulation without cover 20 dB, with cover 50 dB.



St	Steel
FS	Strip galvanised

Master data

Item number	6480023
Type	GKS FL 120 FS
Description 1	Cable tray
Description 2	unperforated
Manufacturer	OBO
Dimension	100x200x3000
Colour	zinc
Material	Steel
Surface	Strip galvanised
Surface standard	DIN EN 10346
Smallest sales unit	3
Unit of quantity	Metre
Weight	323.42 kg
Weight unit	kg/100 m


Technical data sheet

Cable tray GKS FL 100 FS


Item number: 6480023



Dimensions

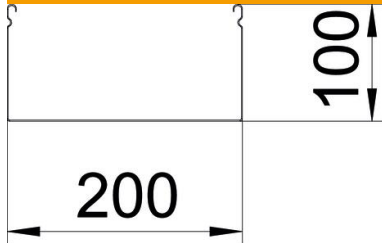

Length	3,000 mm
Width	200 mm
Height	100 mm
Plate thickness	0.9 mm
Dimension B	200 mm
Dimension H	100 mm
Dimension L	3,000 mm

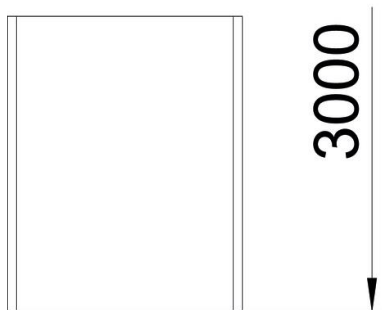

Technical data

Walkable	no
Maintain electrical functions	no
With cover	no
Mounting perforation in base	no
NATO hole pattern	no
Usable cross-section	198 cm ²
Usable cross-section	19800 mm ²
Rustproof steel, pickled	no
Side perforation	yes
Wide-span version	no
Load test type according to IEC 61537	Type II
Type of connector, cable support system	Screwed

Technical data sheet


Cable tray GKS FL 100 FS

Item number: 6480023



Loads

Support spacing 1.5 m	1.85 kN/m
Support spacing 2.0 m	1.3 kN/m
Support spacing 2.5 m	0.75 kN/m
Support spacing 3.0 m	0.6 kN/m

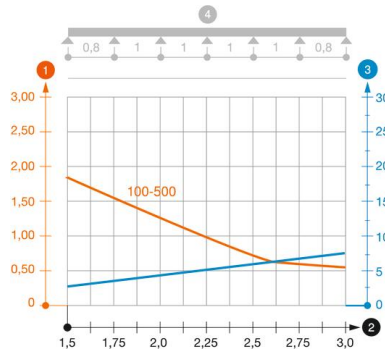

Load diagram, cable tray, type GKS FL100

- 1 Permitted cable tray/ladder load in kN/m without man load
- 2 Support width in m
- 3 Rail bend in mm at permitted kN/m
- 4 Load scheme during testing
- Load curve with cable tray/ladder width in mm
- Strut bend curve according to support width