

Technical data sheet

Cable ladder LG 50, 3 m FT

Item number: 6487002



Cable ladder with perforated side rail of side height 50 mm with riveted C profile rungs, open in an upwards direction. Assignment of the rungs on both sides possible using U clamps.
Magnetic shield insulation without cover 10 dB, with cover 15 dB.



St

Steel

FT

Hot-dip galvanised

Master data

Item number	6487002
Type	LG 520 VS FT
Description 1	Cable ladder
Description 2	perforated
Manufacturer	OBO
Dimension	50x200x3000
Colour	zinc
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	3
Unit of quantity	Metre
Weight	257.967 kg
Weight unit	kg/100 m


Technical data sheet

Cable ladder LG 50, 3 m FT

Item number: 6487002



Dimensions

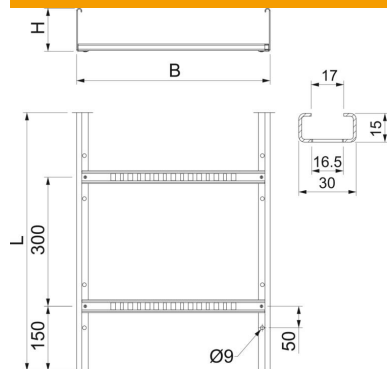

Length	3,000 mm
Width	200 mm
Height	50 mm

Technical data

Fastening of rung	Blind riveted
Mounting system fastening type	Floor Ceiling Wall
Usable cross-section	60 cm ²
Usable cross-section	6000 mm ²
Rung distance	300 mm
Wide-span version	no
Rail thickness	1.5 mm

Loads

Support spacing 2.0 m	0.7 kN/m
Support spacing 2.5 m	0.5 kN/m
Support spacing 3.0 m	0.35 kN/m