

Technical data sheet

PYROPLUG® Block foam block



Item no. 7202505



Soft, permanently elastic foam block for cable and combination insulation. Vertical and transverse installation to achieve different fire resistance classes. Can be combined with the two-component fire protection foam PYROSIT® NG. Can be used in solid ceilings and walls and in light-duty partitions and is approved for many installations. CE-labelled construction product according to ETA-15/0803 for applications with fire resistance periods of up to 120 minutes.

Details on the applications can be found in the approval documents.

Protect the surface of the foam insulation against water in order to guarantee safe expansion in the event of fire. Coating with standard silicone is approved.




Permanently elastic, closed-pore foam

Master data

Item no.	7202505
Type	FBA-B200-14
Description 1	Foam block
Description 2	intumescent
Dimension	200x144x60mm
Colour	Brown
Material	Permanently elastic, closed-pore foam
Smallest sales unit (VG)	4 Piece
Weight	44,80 kg/100 pc.

Technical data

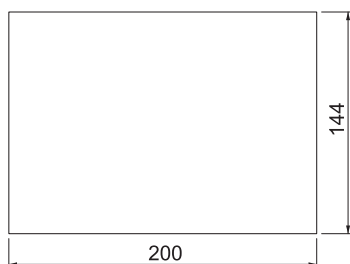

Length	200,00 mm
Width	144,00 mm
Height	60,00 mm
Dimension	200x144x60 mm
Fire protection version	Foam blocks
Shape	Rectangular
Accessories required	<input checked="" type="checkbox"/>