

# Technical data sheet

## Cable ladder LG 50, 3 m

Item no. 6487014



Cable ladder with perforated side rail of side height 50 mm with riveted C profile rungs, open in an upwards direction. Assignment of the rungs on both sides possible using U clamps.

Magnetic shield insulation without cover 10 dB, with cover 15 dB.




|           |                  |
|-----------|------------------|
| <b>St</b> | Steel            |
| <b>FS</b> | Strip galvanised |

### Master data

|                          |                  |
|--------------------------|------------------|
| Item no.                 | 6487014          |
| Type                     | LG 530 VS FS     |
| Description 1            | Cable ladder     |
| Description 2            | perforated       |
| Dimension                | 50x300x3000      |
| Material                 | Steel            |
| Material symbol          | St               |
| Surface                  | Strip galvanised |
| Surface to DIN           | DIN EN 10346     |
| Surface symbol           | FS               |
| Smallest sales unit (VG) | 3 m              |
| Weight                   | 263,67 kg/100 m  |

### Technical data

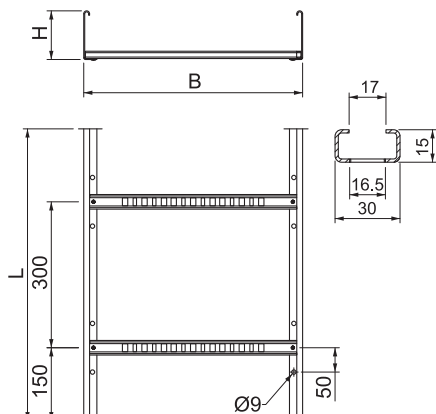

|                      |                          |
|----------------------|--------------------------|
| Length               | 3.000,00 mm              |
| Width                | 300,00 mm                |
| Height               | 50,00 mm                 |
| Side height          | 50,00 mm                 |
| Rail thickness       | 1,50 mm                  |
| Usable cross-section | 9.000,00 mm <sup>2</sup> |
| Usable cross-section | 90,00 cm <sup>2</sup>    |
| Rung distance        | 300,00 mm                |

### Appr. load:

|                       |           |
|-----------------------|-----------|
| Support spacing 2.0 m | 0,70 kN/m |
| Support spacing 2.5 m | 0,50 kN/m |
| Support spacing 3.0 m | 0,35 kN/m |

### Technical data