

Technical data sheet

Cable ladder LG 50, 3 m

Item no. 6487017



Cable ladder with perforated side rail of side height 50 mm with riveted C profile rungs, open in an upwards direction. Assignment of the rungs on both sides possible using U clamps.

Magnetic shield insulation without cover 10 dB, with cover 15 dB.




St	Steel
FS	Strip galvanised

Master data

Item no.	6487017
Type	LG 545 VS FS
Description 1	Cable ladder
Description 2	perforated
Dimension	50x450x3000
Material	Steel
Material symbol	St
Surface	Strip galvanised
Surface to DIN	DIN EN 10346
Surface symbol	FS
Smallest sales unit (VG)	3 m
Weight	297,80 kg/100 m

Technical data

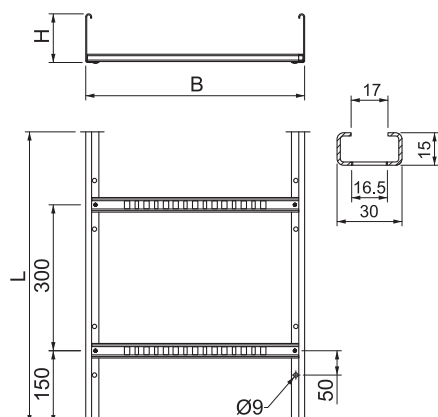

Length	3.000,00 mm
Width	450,00 mm
Height	50,00 mm
Side height	50,00 mm
Rail thickness	1,50 mm
Usable cross-section	13.400,00 mm ²
Usable cross-section	134,00 cm ²
Rung distance	300,00 mm

Appr. load:

Support spacing 2.0 m	0,70 kN/m
Support spacing 2.5 m	0,50 kN/m
Support spacing 3.0 m	0,35 kN/m

Technical data