

Technical data sheet

US 3 support

Item no. 6342457



U support in fixed lengths. Dimensions 30 x 50 mm.

For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 25.




VA Stainless steel, rustproof 1.4301

2B Bright, reworked

Master data

Item no.	6342457
Type	US 3 50 A2
Description 1	U support
Description 2	3-sided perforated
Dimension	50x30x500
Material	Stainless steel, material no. 1.4301
Material symbol	A2
Surface	Bright, reworked
Surface symbol	2B
Smallest sales unit (VG)	1 Piece
Weight	66,00 kg/100 pc.

Technical data

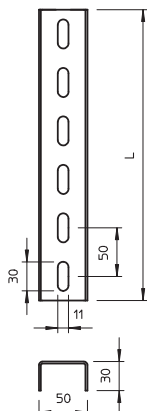

Length	500,00 mm
Dimension	30 x 50 x 2,0 mm
Breakable	☐
Version	Single profile
Type of perforation	3 sides perforated
Suitable for maintaining electrical function	☐
Material thickness	2,00 mm
With tothing	☐
Profile shape	U profile
Static value A	
Static value Iy	
Static value Iz	
Static value Wy	
Static value Wz	