

Technical data sheet

US 7 support

Item no. 6340210



U support in fixed lengths. Dimensions 70 x 50 mm.

For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 61.




St Steel

FT Hot-dip galvanised

Master data

Item no.	6340210
Type	US 7 130 FT
Description 1	U support
Description 2	3-sided perforated
Dimension	70x50x1300
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit (VG)	1 Piece
Weight	540,00 kg/100 pc.

Technical data

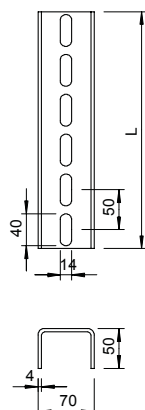

Length	1.300,00 mm
Width	70,00 mm
Height	50,00 mm
Dimension L	1.300,00 mm
Dimension	70 x 50 x 4 mm
Breakable	☐
Version	Single profile
Type of perforation	3 sides perforated
EPD article	☒
Suitable for maintaining electrical function	☒
Hole width	14,00 mm
Material thickness	4,00 mm
With toothing	☐
Profile shape	U profile
Slot width	62,00 mm
Static value A	
Static value Iy	

Technical data sheet

US 7 support

Item no. 6340210



Technical data

Static value Iz	
Static value Wy	
Static value Wz	