

Technical data sheet

Base, MultiBase + NPE with remote signalling


Item no. 5096671



- Suitable for V 25-B+C, V 20-C and V10-C
- Pre-mounted and ready for connection
- Multifunction terminals for easy connection to series-mounted devices
- Upper parts can be rotated through 180 degrees
- With remote signalling, potential-free NO contact, for function monitoring
- 3+1 protection circuit for TN-S and TT network systems



Dimensions

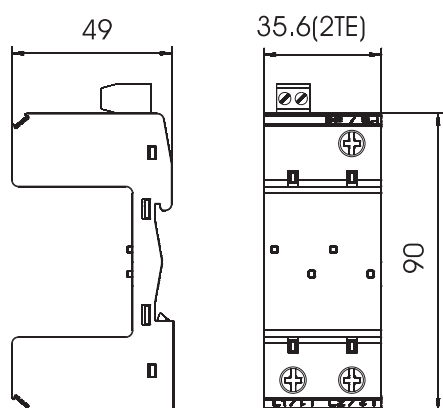

Master data

Item no.	5096671
Type	MB 3+NPE+FS
Description 1	MultiBase
Description 2	3-pole + NPE w. signal contact
Dimension	3+NPE+FS
Smallest sales unit (VG)	1 Piece
Weight	21,00 kg/100 pc.

Technical data

Temperature range	-40+80 °C
Pole version	3+N/PE
Version	3+NPE
Version	3 + NPE
Mounting type	Hat rail 35 mm
Installation type	DIN rail 35 mm
Protection rating	IP20
Protection rating	IP 20
Division unit TE (17.5 mm)	4
Remote signalling	☒

Technical data sheet

Base, MultiBase + NPE with remote signalling

Item no. 5096671



Technical data

Telecommunications contact	☒
Connection cross-section, flexible	2,50 - 25,00 mm ²
Connection cross-section, rigid	2,50 - 35,00 mm ²
Connection cross-section, multi-wire	2,50 - 35,00 mm ²