

Technical data sheet

IsCon® connection element

Item no. 5408022



- Screw-on termination of the connection for the isCon® conductor
- Incl. heat-shrinkable sleeve, hexagonal and screw lock
- Tested up to 150 kA (lightning protection class II)




VA Stainless steel, rustproof 1.4301

Master data

Item no.	5408022
Type	isCon connect
Description 1	Connection element
Description 2	for isCon conductor
Dimension	ø 23mm
Material	Stainless steel, material no. 1.4301
Material symbol	A2
Smallest sales unit (VG)	2 Piece
Weight	21,50 kg/100 pc.

Technical data

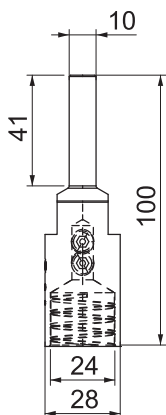

Dimension D	23,00 Ø mm
Lightning current carrying capacity	H1/150 kA
Fit	10 mm