

Technical data sheet

Screed box for GES R2

Item no. 7428526



Height-adjustable screed box for the installation of the installation socket of the GES R2 floor socket.

With 2x2 insertion openings for installation pipes (M20/M25).




St Steel

FS Strip galvanised

Master data

Item no.	7428526
Type	UD GES R2
Description 1	Screed box
Description 2	for GES R2
Material	Steel
Material symbol	St
Surface	Strip galvanised
Surface to DIN	DIN EN 10346
Surface symbol	FS
Smallest sales unit (VG)	1 Piece
Weight	218,00 kg/100 pc.

Technical data

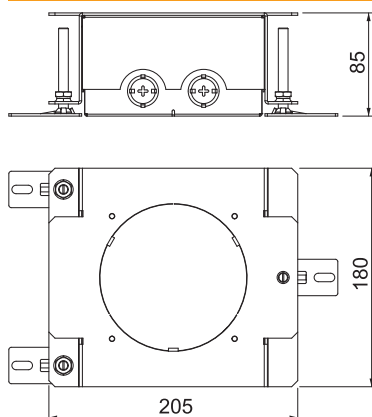

Expansion option	For installation of accessories
Version	Round
Version for	Round
Floor plate	☒
Seal installation option	☐
Installation diameter	122
Installation opening for flush-mount unit	Round
Decouplable	☐
Screed height	85-130 mm
For pipe connection	☒
Suitable for screed-flush closed underfloor ducts	☐
Suitable for screed-covered underfloor ducts	☐
Suitable for underfloor ducts	☐
Suitable for cavity floor installation	☐
Suitable for raised floor installation	☐
Minimum screed height	85
Height-adjustment range	85,00 - 130,00 mm