


Technical data sheet

Angler spreading anchor

Item no. 2349480

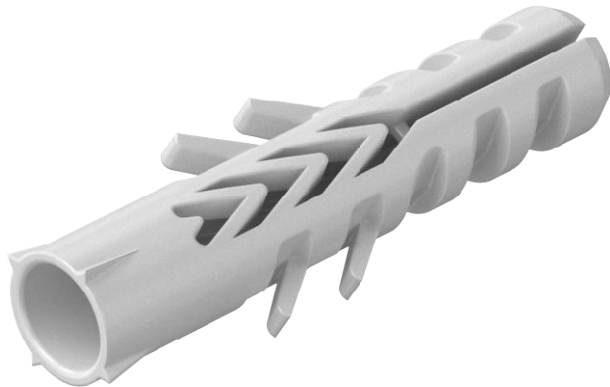

Required minimum screw length = anchor length + component thickness + 1 x screw Ø.
Withdrawal force applies to wood screws of the largest screw diameter, required safety values must be taken into account.




PA Polyamide

Master data

Item no.	2349480
Type	910 F 5x25
Description 1	Spreading anchor
Available from	01.05.2020
Dimension	5x25
Colour	Light grey
Material	Polyamide
Material symbol	PA
Smallest sales unit (VG)	100 Piece
Weight	0,04 kg/100 pc.

Technical data

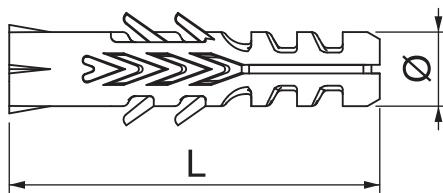

Length	25,00 mm
Dimension D	5,00 mm
Dimension L	25,00 mm
Version for	Universal anchor
Drill hole depth	30,00 mm
Drill hole diameter	5,00 mm
Anchor diameter	5,00 mm
Suitable for fastening with cable ties	<input type="checkbox"/>
Suitable for gas concrete	<input type="checkbox"/>
Suitable for hexagonal wood screw	<input checked="" type="checkbox"/>
Halogen-free	<input checked="" type="checkbox"/>
Wood screws	2,5-4 Ø mm
With edge	<input type="checkbox"/>
With bolts	<input type="checkbox"/>
Concrete Fempf.	230,00 N
Full brick Mz12 Fempf.	240,00 N
Porous concrete P2 Fempf.	40,00 N
Porous concrete P4 Fempf.	40,00 N
Hollow brick Hlz12 Fempf.	90,00 N
Solid calcareous sandstone KSL12 Fempf.	330,00 N