

Technical data sheet

Empty housing X 16

Item number: 2005610



Junction box for the connection of cables and lines indoors and in outdoor areas. Rectangular design without entries. Suitable for wall and ceiling mounting with the option to fasten outside, inside or to mount via the corner domes. Particularly impact resistant with IK09. Cover with quick lock, sealable. Made from halogen-free and UV-resistant materials.

Junction box according to DIN EN 60670. Impact resistance IK09 according to DIN EN 50102. Protection rating IP67 according to DIN EN 60529.



PC Polycarbonate

Master data

| | |
|------------------------------------|--------------------------|
| Item number | 2005610 |
| Type | X16C SW |
| Description 1 | Empty Enclosure |
| Manufacturer | OBO |
| Dimension | 240x191x125 |
| Colour | Graphite black; RAL 9011 |
| Material | Polycarbonate |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 78.4 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 2,9673 kg CO2e / 1 Piece |


Technical data sheet

Empty housing X 16

Item number: 2005610



Dimensions

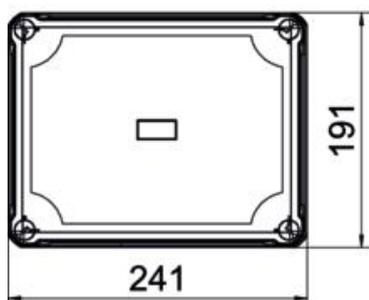

| | |
|--------|--------|
| Length | 241 mm |
| Width | 191 mm |
| Height | 126 mm |

Technical data

| | |
|---------------------------------------|-----------------------|
| Extension option | no |
| Cover fastening | Screwed |
| Shape | Rectangular |
| Suitable for outdoor use | yes |
| Clear internal dimensions with lid | 227x177x110 mm yes |
| Mounting type | Surface-mounted |
| Protection rating | IP67 |
| Protection rating IK code | IK09 |
| Protection class | II |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -5 °C |
| Weatherproof | yes |